



"Passionately Protecting Mother-Nature since 1978"

Estd. Since 1978

Bharat Oil Company (I) Regd.

Recycling & Incineration of Hazardous Wastes

ISO 9001-2015



Lube Oil Re-Refining
& Wholesale of
Industrial Lubricating Oils

Hazardous
& E-Waste
Management

Incineration,
Pre-Processing
of Waste

WTS™ - Enterprise
Waste Tracking &
Management Software

Regd with
MoeF&CC / CPCB
as Recycler & Reprocessor


Authorised by UPPCB,
for Lube Oil Recycling,
HW & E-Waste Management

SEPL™ - NABL Accredited Laboratory for Testing of Air,
Water, Soil, Hazardous Waste / Sludge / Slurry / Soil
/ Sediments / Chemicals/Materials

Specifications of Gear Oil ISO (VG 220)

Parameters	Result
Viscosity @ 40°C (cSt)	201
Viscosity Index	90
Flash Point (COC)	215°C
Pour Point	- 3°C
Copper Corrosion Test (3 hrs @ 100°C)	1
Demulsibility Test @ 54°C (40/37/3 ml in 30 min)	40-39-1

Application - Gear oil ISO VG 220 is a **medium-to-high viscosity industrial gear lubricant**, widely used for enclosed gear systems that operate under **moderate to heavy loads** like (Enclosed Gearboxes, Material Handling Equipment, Bearings & Couplings, Marine & Offshore, Pumps & Compressors and Paper Mills & Textile Machinery)

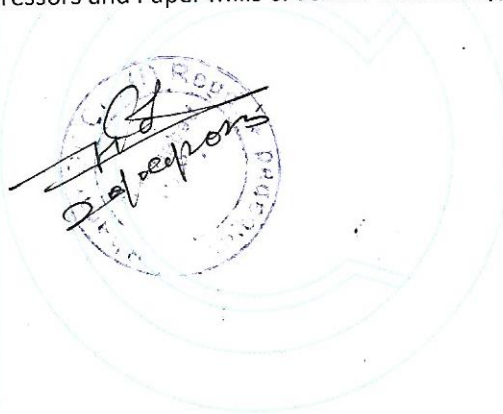

Regd. & Sales/Corporate Office:
Building No. 11, LGF, Community Centre,
East of Kailash, New Delhi - 110065, India
Ph : 011-41000710, 26210205, 26216466

Facilities:
E - 18, Sahibabad Industrial Area, Site 4,
Ghaziabad - 201010, UP, India

Sales/WhatsApp : +91-9717706048

Email : sales@bharatoil.com, Website : www.bharatoil.com

